




CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL :

SERIES SPECIFICATIONS

30/50 Amp, 125/250 Volt, NEMA 10-30P/10-50P, 3P, 3W,
 Plug, Straight Blade, Industrial Grade, Non-Grounding, Angle,
 - Black



LINE DRAWING

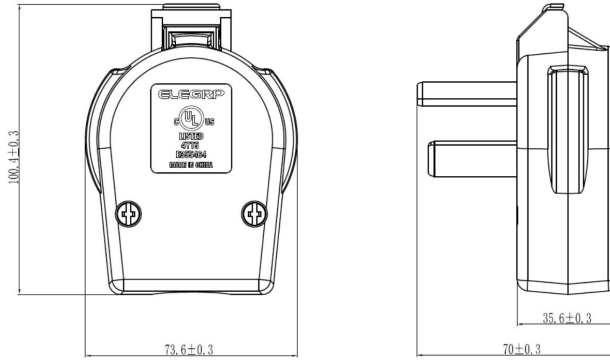

CONSTRUCTION

Finish
 Black

Cover Material
 PVC

Blade/Contacts
 Solid Brass

Assembly Screws
 Steel, Zinc Plated

NEMA
 10-30P/10-50P

ELECTRICAL SPECIFICATIONS

Voltage
 125/250VAC

Amperage
 30/50A

Grounding
 No

Wire
 3

Poles
 3

AC Horsepower Ratings
 30A : 2HP
 50A : 3HP

Dielectric Voltage
 Withstands 2000V per UL498

Current Limiting
 Full Rated Current

Temperature Rise
 Max 30°C after 50 cycles OL at
 150 percent rated current

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL :

ENVIRONMENTAL SPECIFICATIONS

Flammability

Rated V-2 per UL94

Operating Temperature

-40°C to 60°C

MECHANICAL SPECIFICATIONS

Terminal Accept

10 to 6 AWG

CERTIFICATIONS/WARRANTY

Listing

UL Listed

Warranty

Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Part Number: RPP335AP

IMS Code : 0425-4465

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM