




CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL :

SERIES SPECIFICATIONS

30/50 Amp, 125/250 Volt, NEMA 14-30P/14-50P, 3P, 4W, Plug, Straight Blade, Industrial Grade, Grounding, Angle, - Black



LINE DRAWING

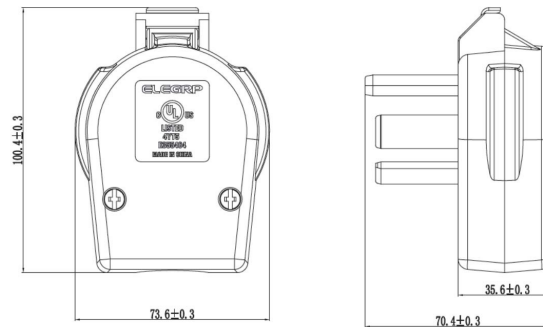

CONSTRUCTION

Finish

Black

Cover Material

PVC

Blade/Contacts

Solid Brass

Assembly Screws

Steel, Zinc Plated

NEMA

14-30P/14-50P

ELECTRICAL SPECIFICATIONS

Voltage

125/250VAC

Amperage

30/50A

Grounding

Yes

Wire

4

Poles

3

AC Horsepower Ratings

30A : 2HP

50A : 3HP

Dielectric Voltage

Withstands 2000V per UL498

Current Limiting

Full Rated Current

Temperature Rise

Max 30°C after 50 cycles OL at 150 percent rated current

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM



CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL :

ENVIRONMENTAL SPECIFICATIONS

Flammability

Rated V-2 per UL94

Operating Temperature

-40°C to 60°C

MECHANICAL SPECIFICATIONS

Terminal Accept

10 to 6 AWG

CERTIFICATIONS/WARRANTY

Listing

UL Listed

Warranty

Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Part Number: RPP435AP

IMS Code : 0425-4468

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM