



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL: RV OUTLET BOX

SPECIFICATION & FEATURES

RV Outlet Box
30A Rated
UL Listed NEMA TT-30R Receptacle
NEMA3R/ IP 32 Rated Enclosure

RV Power Outlet Box comes ready to use with no need to assemble individual parts, saving installation time. The single, heavy-gauge NEMA 3R rainproof enclosure protects against weather and vandalism.



CERTIFICATIONS/WARRANTY

Warranty

Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

Listings

UL Listed NEMA TT-30R Receptacle
NEMA3R/ IP 32 Rated Enclosure

CONSTRUCTION

NUMBER OF OUTLET

1

MATERIAL

Metal

SIZE

7x5x5"

COLOR

Grey

CABLE ENTRY

6

MOUNTING

In Wall Mount

KNOCKOUTS

6

AMPERAGE

30

NEMA

TT-30R

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



11675 SW TOM MACKIE BLVD. | PORT ST. LUCIE, FL 34987 | P: 772.878.4944 | WWW.RPP-USA.COM



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL:


INSTALLATION

USED WITH 30AMP/50AMP UL&CUL LISTED FLUSH MOUNT RECEPTACLES

For use with copper or aluminum wire Connect line wires to proper terminals on receptacle

INSTALLATION

1. Loosen screw of the surface, remove the cover.
2. Remove cable knockouts and install cable clamp or conduit connector.
3. Pass the wires thru the cable clamp. strip wires as required (1/2 inch).
4. Refer to the figure on the right for wiring, connect wires to proper terminals on receptacle, tighten each terminal screw.
5. Assemble receptacle with box cover.
6. Install the cover and tighten the screw.

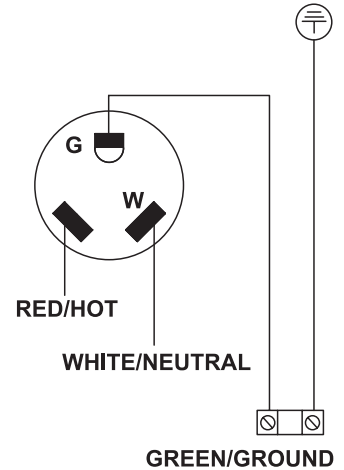

CAUTION!!!

RISK OF FIRE, SHOCK OR DEATH, TURN OFF CIRCUIT BREAKER BEFORE INSTALLATION.

LUG TIGHTENING TORQUE(LB-IN)

SIZE OF CONDUCTOR	#10	#8	#6-#4
LINE TERMINALS	32-35	40	45
GROUND TERMINALS	32-35	40	45

WIRE RANGE

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRD	SOLID	STRD
LOAD-VIA PLUG	10-8	10-6	10-8	10-6
NEUTRAL-GL3 INSULATED	10-8	10-6	10-8	10-6
EQUIP.GRO-GL3	10-8	10-2	10-8	10-4

WHEN CABINET HAS PROVISIONS FOR A CONDUIT HUB, SELECT FROM THE CHART BELOW

CONDUIT SIZE	CONDUIT CAP	3/41		1 1/41	1/2
CAT.NO.	B01B	07	B10B	12	B15

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



11675 SW TOM MACKIE BLVD. | PORT ST. LUCIE, FL 34987 | P: 772.878.4944 | WWW.RPP-USA.COM



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL:

ORDERING INFORMATION

Part Code	IMS Code
RVPWRB30	0586-5378

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

