




MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

- Single 15 A Receptacle with Dual USB Charger
- 2 USB ports with a power of 4A, 5VDC
- Charge most compatible electrical devices directly without an adapter
- Tamper-Resistant shutters provide compliance with 2011 NEC code
- Back and side wire for easy installation



LINE DRAWING

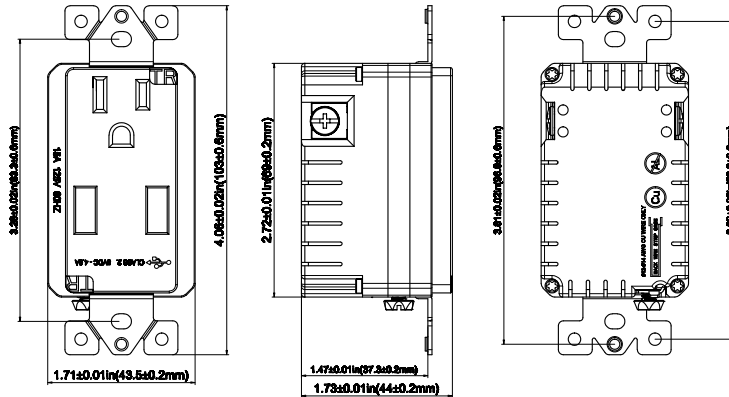

CONSTRUCTION

No. of Plugs
1

USB Ports
2

Wire Terminals
#14-#12 AWG

ELECTRICAL SPECIFICATIONS

Output Voltage
5VDC

Amperage
4A

Receptacle Rating
15A, 125VAC

Operating Temp.
-4°F ~ 140°F (-20°C ~ 60°C)

Max Load
15A

Strip Length
0.5 Inch (back wire holes)
1 Inch (screw terminal)

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM



MODEL :		TYPE
PROJECT :		
PREPARED BY :		DATE :

CERTIFICATIONS

Listing
UL Listed

ORDERING INFORMATION

Part Code	IMS Code
USB15SR-WH	0369-9558

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

