



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## SERIES SPECIFICATIONS

Passive Infrared Vacancy Sensor w/ manual override switch, 15A 120V,  
 Single Pole, Auto Off  
 Manual On-Automatic Off  
 Automatic off after time delay expires with manual "off" option  
 Adjustable sensitivity settings  
 Complies with California Title 24  
 Decorator Wallplate Included



## CONSTRUCTION

Color White	Mounting Wall	Operation Temperature 32°F to 131°F (0°C to 55°C)
Sensor Technology Passive Infrared	Time Delay 15 Seconds to 30 Minutes	Light Level 30 Lux-Daylight
Coverage 1 180° 980Ft. <sup>2</sup>	Coverage 2	

## ELECTRICAL SPECIFICATIONS

Voltage 120 V AC	Poles Single	Hertz 60 Hz
Horsepower 1/8 HP	Time Delay 15 Seconds to 30 Minutes	Load Rating 1 Incandescent lamp: 500 Watt
Load Rating 2 Flourescent lamp: 500 VA	Load Rating 3 Motor Load: 1/8HP	Load Rating 4 LED: 100W

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

**CERTIFICATIONS/WARRANTY**

Listing  
cULus Listed

Warranty  
Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

**ORDERING INFORMATION**

Part Number: VCSSVW15-WH


Box Qty : 10

Weight (Lbs) : 0.331

Carton Qty. : 40

IMS Code : 0277-7106

**ORDERING INFORMATION**

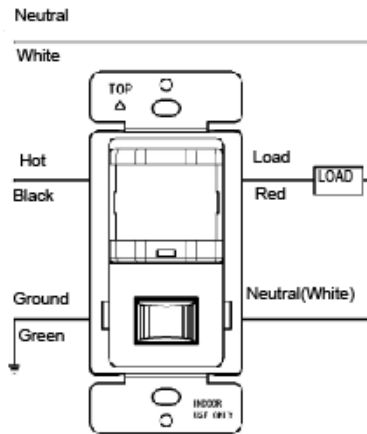

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

